



# Globestock Engineering Ltd.

Manufacturers of Safety & Fall Arrest Equipment

Mile Oak Industrial Estate, Maesbury Road, Oswestry, Shropshire SY10 8GA

Tel: 01691 654966


Fax: 01691 661726

e-mail: [info@globestock.co.uk](mailto:info@globestock.co.uk)

<http://www.globestock.co.uk>

## G-WINCH

A 50 metre winch, ideal for use in confined space applications. It can be quickly & easily attached to the G-Tripod. Recommended for use in conjunction with the G-Saver II, which ensures the safe and easy raising / lowering of personnel.

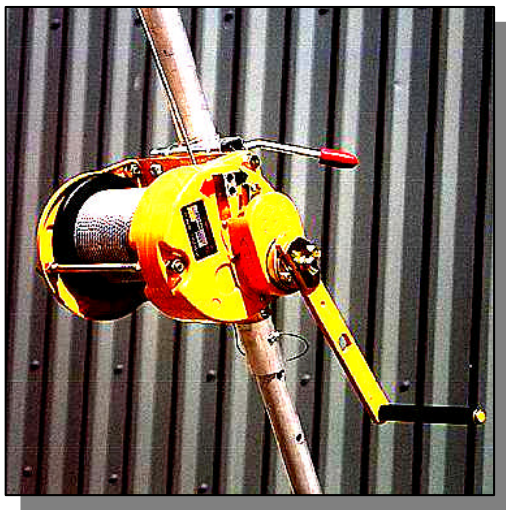

### •Two modes of use:

Normal for personnel use.

Rapid for quickly winding cable in or out.

•Easy to wind up with a self locking action, in Normal mode, to prevent a load falling upon releasing the handle.

•Fitted with a maximum 50 metres of 5mm diameter galvanized steel cable and karabiner for attaching to a user's harness.

The G-Winch has a high mechanical efficiency & a light, smooth action making personnel hoisting easy.

The gears used are case hardened to give a long, wear resistant life as well as toughness & durability.

Cable retrieval rate of 50mm per handle revolution or 500mm per handle revolution when in rapid retrieval mode.

Gear Ratio 1 : 8.9

Tough & durable pressed steel powder coated casing .

Weight with 50m of cable: 21.5kg.



Complies with all current legislation when used in conjunction with the G-Saver II

Safe Working Load for Man Riding **136kg**

Safe Working load for Material Handling **200kg**.

**Note: Globestock Ltd reserve the right to change specifications without prior notice**