

Arrester Bracket



User Instructions

(Original Instructions)

Issue 01

This bracket enables the G.Saver II or G.Stop models of fall arresters to be securely fitted to an Xtirpa Davit Arm.

The anchorage strength requirements stated on the G.Saver II/G.Stop must be maintained.

GSEABX14

GSEABX20

GSEABX34



☎: +44 (0) 1691 654 966

✉: info@globestock.co.uk

💻: www.globestock.co.uk

📱: @globestock_ltd


Globestock Limited, Mile Oak Industrial Estate, Maesbury Road, Oswestry, Shropshire, SY10 8GA UK

Instructions for Installation



Remove the shackle if it is fitted.
Remove the retaining pin from the arrester bracket.

Line up the fall arrest device with the arrester bracket.
Locate the locking pin through the arrester bracket and the fall arrest device.
Close the top bracket and tighten the handnut.

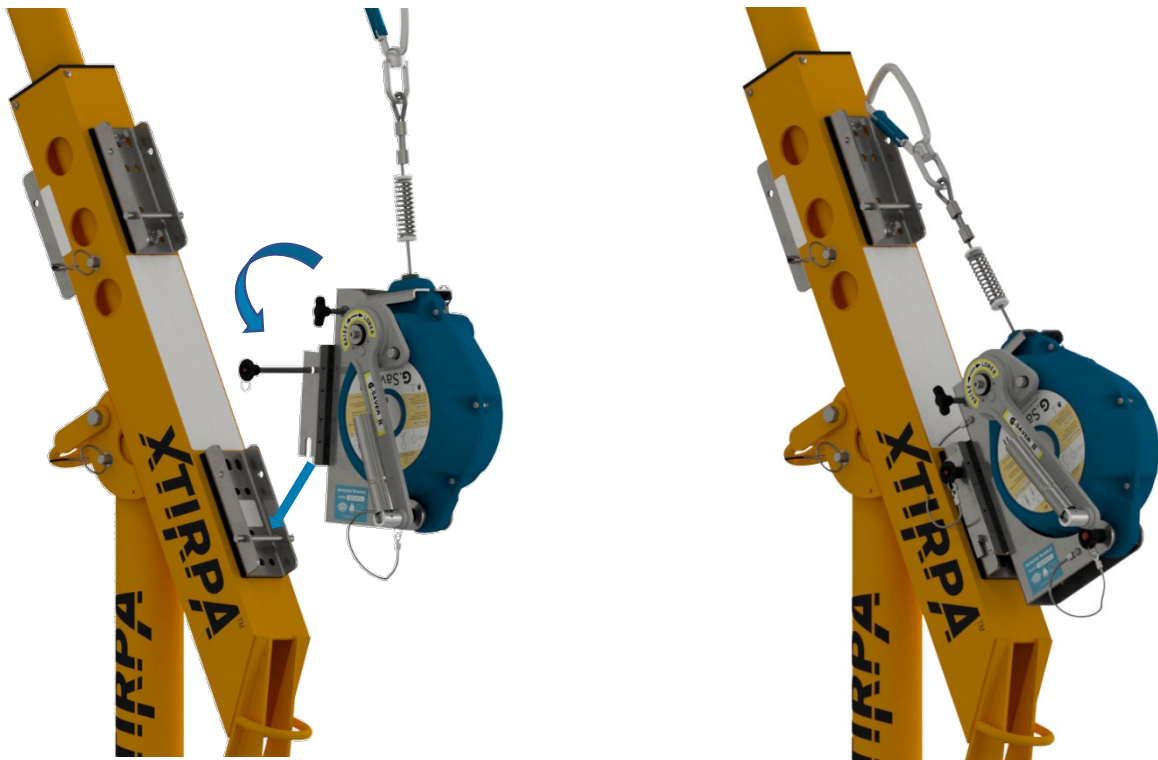

Remove the locking pin from the arrester bracket.
Hook the arrester bracket onto the interface plate of the davit, rotate into place and replace the pin.

Feed the cable from the fall arrest device through the cable retention pins and over the pulley.